


SERIE 500

RIDUTTORE RIPARTITORE A 2 VEL. CON DIFFERENZIALE IN USCITA

2 SPEEDS DISTRIBUTOR REDUCTION UNIT WITH DIFFERENTIAL IN OUTPUT
 REDUCTEUR REPARTITEUR A 2 VITESSES AVEC DIFFERENTIEL A LA SORTIE
 2 GANG UNTERSETZUNGS VERTEILERGETRIEBE MIT DIFFERENTIAL AM AUSGANG

EME R 500-2 iDR-UV2D-R-BL500

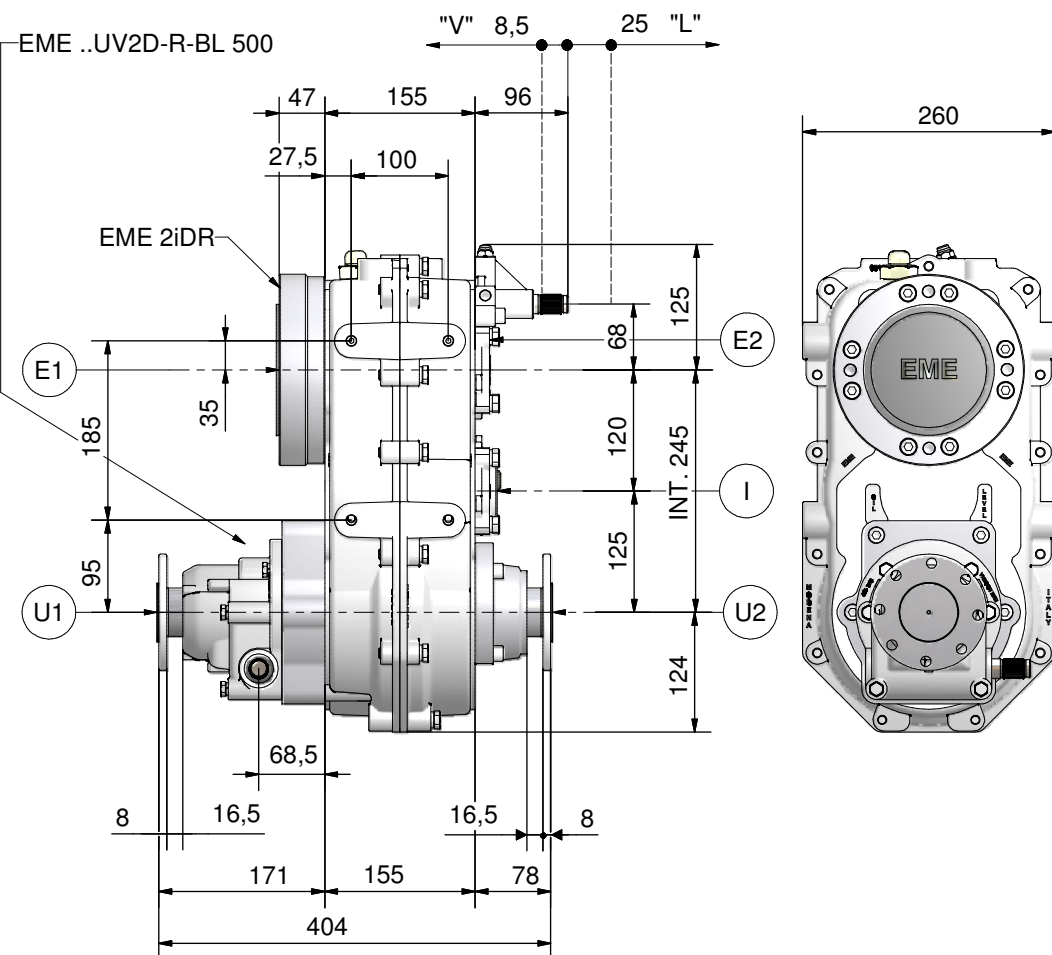

DATI TECNICI-SPECIFICATIONS-DONNEES TECHIQUES-TECHNISCHE DATEN

COPPIA MAX. IN ENTRATA - MAX INPUT TORQUE COUPLE MAXI A L'ENTREE - MAX ANTRIEBSDREHMOMENT	da Nm (kgm)	90
COPPIA MAX. IN USCITA - MAX. OUTPUT TORQUE COUPLE MAXI A LA SORTIE - MAX. ABTRIEBSDREHMOMENT	da Nm (kgm)	330
REGIME MAX. IN ENTRATA - MAX INPUT REVERS PER MINUTE REGIME MAXI A L'ENTREE - MAX ANTRIEBSDREHZAHL	giri/min	6000

PREDISPOSIZIONI - PREDISPOSITIONS - DISPOSITIONS - VOREINSTELLUNGEN

MOTORE IDROSTATICO - HYDROSTATIC ENGINE MOTEUR HYDROSTATIQUE - HYDROSTATISCHER MOTOR	EME ..2iDR (SAE B)	(E1)
DIFFERENZIALE INTERNO - INSIDE DIFFERENTIAL DIFFERENTIEL INTERIEUR - INNENDIFFERENTIAL	EME ..UV 2 D - R	
BLOCCAGGIO DIFFERENZIALE - DIFFERENTIAL LOCK BLOCAGE DU DIFFERENTIEL - DIFFERENTIALSPERRE	EME ..BL 500 (DIN 120)	
FLANGIA AL GIUNTO - FLANGE TO THE JOINT BRIDE AU JOINT - KUPPLUNGSFLANSCH	EME ..UV 2 (DIN 120)	(U2)
CONTACHILOMETRI - ODOMETER COMPTEUR KILOMETRIQUE - KILOMETERZAHLER	EME ..C.C.I.	(I)
SENSORE - SENSOR CAPTEUR - SENSOR	EME ..S.P.	

OPTIONAL

FLANGIATURA AL PONTE - FLANGING TO THE AXLE
 BRIDAGE A L'ESSIEU - ACHSFLANSCHEN (Pag...004-045)

RAPPORTI - RATIOS - RAPPORTS - UNTERSETZUNGEN "i"	
"V"	"L"
1,2285 : 1	3,7424 : 1
1,4857 : 1	4,5261 : 1
1,9487 : 1	5,9368 : 1
2,6432 : 1	8,0525 : 1

